

### Cable You Can Trust


Achieving system-level 99.999% availability and high customer satisfaction requires a complete system solution. End-to-end connectivity includes high performance radios, management systems, and proper installation and grounding. Commercial or indoor Ethernet cable is insufficient for wireless broadband applications and can put both your connectivity and reputation at risk. Choose the right cable to deliver the best connectivity.


**Durability:** Cable needs to withstand outdoor conditions over the long term, including the following:

- · Water ingress
- · UV and sunlight exposure
- · Rodent activity
- · Mechanical wear and abrasion

**Performance:** Installations need to provide high-capacity connectivity. The solutions must provide:

- · Crosstalk protection
- · Shielding from EMI and RF interference

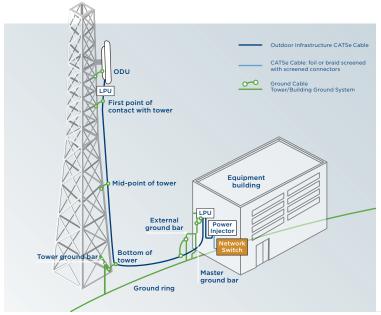

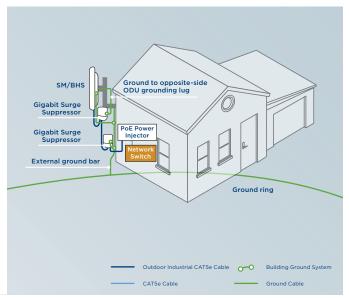

**INSTALLATION AT A TOWER** 

**INSTALLATION AT A RESIDENCE** 


# **SPECIFICATIONS**

	INDUSTRIAL GRADE	INFRASTRUCTURE GRADE
Recommended Applications	PMP 450i SMs, ePMP 1000/2000, cnPilot, Tactical Installations of PTP links	PTP 670, PTP 700, PMP 450m, PMP 450i APs
Construction	70% Copper Braid Mesh and 100% Aluminum Foil	100% Copper Clad Steel and Gel-filled
Conductors	24 gauge solid copper	24 gauge solid copper
Jacket	Industrial Grade PVC	Polyethylene
Diameter	8.4 mm	9.1 mm
Model Numbers		
1,000 ft. / 300 meter	N00000L108A	WB3175A
328 ft. / 100 meter	N00000L107A	WB3176A
50 meter	N00000L106A	Not available
Recommended RJ-45 Connectors	C000000L109A (100 pack shielded)	WB3177B (100 pack unscreened)
Recommended RJ-45 Crimp Tool	C000000L110A	WB3211A

# Choose the Right Solution


### **Industrial Grade**

- Bonded pairs for consistency in performance on long drop cables
- Sunlight and oil resistant industrial grade PVC jacket
- 24 gauge solid copper conductors

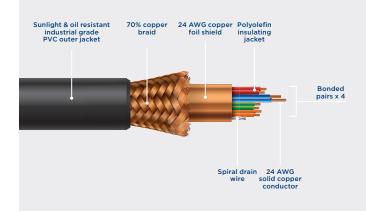


### Infrastructure Grade

- · Sunlight and weather resistant polyethylene jacket
- Copper-clad armor for shielding, mechanical protection and rodent resistance
- Gel-filled for preventing water intrusion
- 24 gauge solid copper conductors

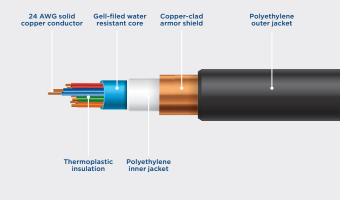

# QUALITY THROUGH VERIFICATION TESTING

WIRELESS			
INSTALLATION THREATS	TYPICAL STANDARD COMMERCIAL CABLE	INDUSTRIAL CABLE FEATURES	INFRASTRUCTURE CABLE FEATURES
Tower struts, building corners	Exposed conductors leading to loss of mechanical and electrical integrity	Industrial PVC	Polyethylene Jacket
-40C; tight radii on tower runs	Brittle / cracked jacket exposes conductors	Industrial PVC; bonded pairs	Polyethylene Jacket
-40C; cable motion in heavy winds	Brittle / cracked jacket exposes conductors	Industrial PVC	Polyethylene Jacket
Aggressive wire-ties and strapping. Stepped on cables	Risk of shorting	Rugged outer jacket	Copper clad steel shield
Punctures	Risk of shorting	Copper braid	Copper clad
+75C	Increased impedance over time	+75C	+75C
Solvents, chemicals on towers	Compromised jacket exposes conductors to chemicals and water	Industrial PVC	Polyethylene Jacket
Long-term outdoor exposure	Discoloration , brittleness	Industrial PVC	Polyethylene Jacket
Flooding; heavy rains	Increased impedance and imbalances due to water intrusion	Industrial PVC	Gel-filled and dry water block
	Tower struts, building corners  -40C; tight radii on tower runs  -40C; cable motion in heavy winds  Aggressive wire-ties and strapping. Stepped on cables  Punctures  +75C  Solvents, chemicals on towers  Long-term outdoor exposure	Tower struts, building corners  Exposed conductors leading to loss of mechanical and electrical integrity  -40C; tight radii on tower runs  Brittle / cracked jacket exposes conductors  -40C; cable motion in Brittle / cracked jacket exposes conductors  Aggressive wire-ties and strapping. Stepped on cables  Punctures  Risk of shorting  +75C  Increased impedance over time  Solvents, chemicals on towers  Compromised jacket exposes conductors to chemicals and water  Long-term outdoor exposure  Discoloration , brittleness  Flooding; heavy rains  Increased impedance and imbalances due to water	Tower struts, building corners  Exposed conductors leading to loss of mechanical and electrical integrity  -40C; tight radii on tower runs  Brittle / cracked jacket exposes conductors  Brittle / cracked jacket   Industrial PVC; bonded pairs  -40C; cable motion in   Brittle / cracked jacket exposes conductors  Aggressive wire-ties and strapping. Stepped on cables  Punctures  Risk of shorting  Copper braid  +75C  Increased impedance over time  Solvents, chemicals on towers  Compromised jacket exposes conductors lndustrial PVC  Flooding; heavy rains  Increased impedance and imbalances due to water  Industrial PVC  Industrial PVC



# ABOUT CAMBIUM NETWORKS

Cambium Networks is a leading global provider of wireless connectivity solutions that strengthen connections between people, places and things. Specializing in providing an end-to-end wireless fabric of reliable, scalable, secure, cloud-managed platforms that perform under demanding conditions, Cambium Networks empowers service providers and enterprise, industrial and government network operators to build intelligent edge connectivity. Cambium Networks' commitment to continuous innovation and social responsibility in wireless access is demonstrated in the millions of radios deployed in thousands of networks that benefit communities around the world. Headquartered outside Chicago and with R&D centers in the U.S., U.K. and India, Cambium Networks sells through a range of trusted global distributors.

www.cambiumnetworks.com www.connectingtheunconnected.org

### India Office

Cambium Networks Consulting Private Ltd
5th Floor, Quadrant 1, Umiya Business Bay, Tower 2,Outer Ring Road,
Kadubisenahalli, Varthur Hobli Road, Bangalore East
Taluk, Bangalore- 560037
+91 80 67333100

### San Jose Office

2590 N. 1st Street, Suite 220 San Jose, CA 95131 USA

### US Office

3800 Golf Road, Suite 360 Rolling Meadows, IL 60008 USA +1 888 863 5250

### UK Office

Unit B2, Linhay Business Park Eastern Road Ashburton, United Kingdom, TQ13 7UP +44 1364 655500

Copyright ® 2018 Cambium Networks, Ltd.