

# PMP 450i Access Point

Cambium Networks industry-leading 450 platform includes the all new PMP 450i and PTP 450i radios. The 450i product platform is the most scalable industrial-grade wireless broadband solution available.

Key Features:

- **Ultra-wide band** radios support the entire band, whether in 5 GHz or 3 GHz. Advanced radio design improves transmit power and increases receive sensitivity.
- **Rugged metal enclosure** designed to meet IP-66 and IP-67 standards to withstand harsh environments. Optional ATEX/HAZLOC certified models available for hazardous deployments.
- **Dynamic Interference Filtering** to provide industry leading noise isolation for improved performance
- Updated FPGA and SoC architecture **triples the processing power** compared to PMP 450
- **Multifunction AUX port** allows for greater flexibility for deployment by adding a camera or other PoE directly.
- Option with new **Integrated 90 degree sector antenna** optimized for frequency re-use (>35 dB F/B), high gain, null fill and predictable performance.



PRODUCT		RoW	US	EU	DES only	IC
5 GHz Model Numbers	Connectorized	C050045A001A	C050045A002A	C050045A003A	C050045A004A	C050045A015A
	Integrated 90° sector	C050045A005B	C050045A006B	C050045A007B	C050045A008B	C050045A016B
3 GHz Model Numbers	Connectorized	C030045A001A	C030045A001A	C030045A001A	C030045A003A	C030045A001A
	Integrated 90° sector	C030045A002A	C030045A002A	C030045A002A	C030045A004A	C030045A002A

SPECTRUM	
Channel Spacing	Configurable on 2.5 MHz increments, 3 GHz customizable to 50 KHz
Frequency Range	3 GHz : 3300 - 3900 MHz <span style="float: right;">5 GHz : 4900 - 5925 MHz</span>
Channel Width	5 MHz, 7 MHz, 10 MHz, 15 MHz, 20 MHz or 30 MHz <span style="float: right;">5 MHz, 10 MHz, 15 MHz, 20 MHz or 30 MHz</span>

## INTERFACE

MAC (Media Access Control) Layer	Cambium Networks proprietary
Physical Layer	2x2 MIMO OFDM
Ethernet Interface	100/1000BaseT, full duplex, rate auto negotiated (802.3 compliant)
Protocols Used	IPv4, UDP, TCP, IP, ICMP, Telnet, SNMP, HTTP, FTP
Network Management	HTTP, HTTPS, Telnet, FTP, SNMP v3
VLAN	802.1ad (DVLAN Q-inQ), 802.1Q with 802.1p priority, dynamic port VID

## PERFORMANCE

Subscriber Per Sector	Up to 238	
ARQ	Yes	
Modulation Levels (Adaptive)	MCS	Signal to Noise Required (SNR, in dB)
2X	QPSK	10
4X	16QAM	17
6X	64QAM	24
8X	256QAM	32
Maximum Deployment Range	Up to 40 miles (64 km)	
Latency	3 - 5 ms, typical	
GPS Synchronization	Yes, via Autosync (CMM4)	
Quality of Service	Diffserve QoS	

## LINK BUDGET

Integrated Sector Antenna	90° Azimuth, 8° Elevation (3dB rolloff), 2° Electrical Downtilt, Dual polarity
Antenna Gain	17 dBi ± 1 dBi integrated 90° sector or external
Transmit Power Range	40 dB dynamic range (to EIRP limit by region) (1 dB step)
Maximum Transmit Power	+27 dBm combined output (+25 dBm combined for 3 GHz)

## PHYSICAL

Antenna Connection	50 ohm, N-Type (Connectorized version only)	
Surge Suppression (LPU fitted)	EN61000-4-5: 1.2us/50us, 500 V voltage waveform Recommended external surge suppressor: Cambium Networks Model # C000000L033A	
Mean Time Between Failure	> 40 Years	
Environmental	IP67, IP66	
Temperature / Humidity	-40°C to +60°C (-40°F to +140°F), 0-95% non-condensing	
Weight	Connectorized	Approx. 2.0 kg (4.5 lbs)
	Integrated	Approx. 7.5 kg (16.5 lbs)
Wind Survival	Connectorized	322 km/h (200 mi/h)
	Integrated	200 km/h (124 mi/h)
Dimensions (HxWxD)	Connectorized	26.0 x 13.4 x 6.4 cm (10.3" x 5.3" x 3.3")
	Integrated	59.7 x 16.2 x 15.2 cm (23.5" x 6.4" x 6")
Power Consumption	15 W typical, 25 W max, 55 W max with Aux port PoE out enabled	
Input Voltage	48-59 V DC, 802.3at compatible	



## SECURITY

Encryption 56-bit DES, FIPS-197 128-bit AES

## CERTIFICATIONS

Industry Canada	TBD (3 GHz)	109A0-50450I (4.9, 5.2, 5.4, 5.8 GHz)
FCC ID	TBD (3 GHz)	QWP-50450I (4.9, 5.1, 5.2, 5.4, 5.8 GHz)
CE	EN 302 326-2 v1.2.2 (3 GHz)	EN 301 893 v1.7.1 (5.4 GHz)
	EN 302 326-3 v1.3.1 (3 GHz)	EN 302 625 v1.1.1 (Broadband Disaster Relief, 4.9 GHz, 5.1 GHz)
		EN 302 502 v1.2.1 (5.8 GHz)

### 5 GHz ANTENNA PATTERN FOR INTEGRATED SECTOR:

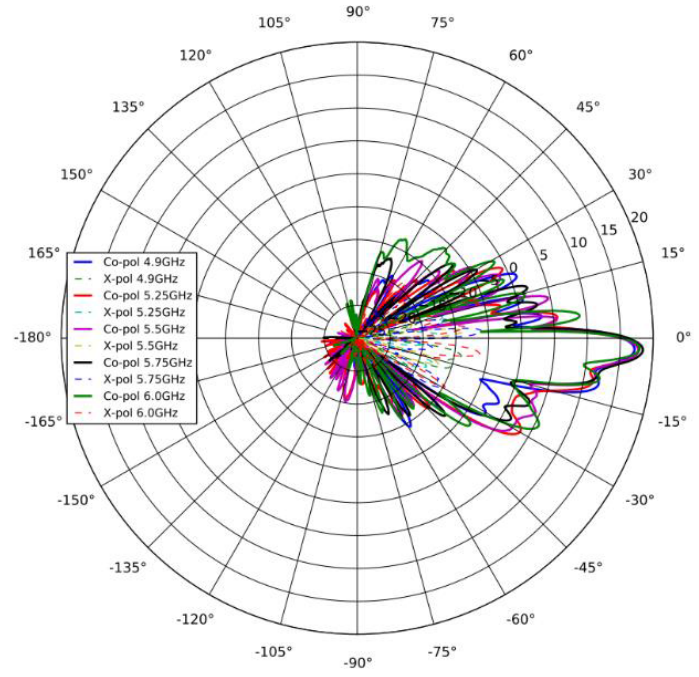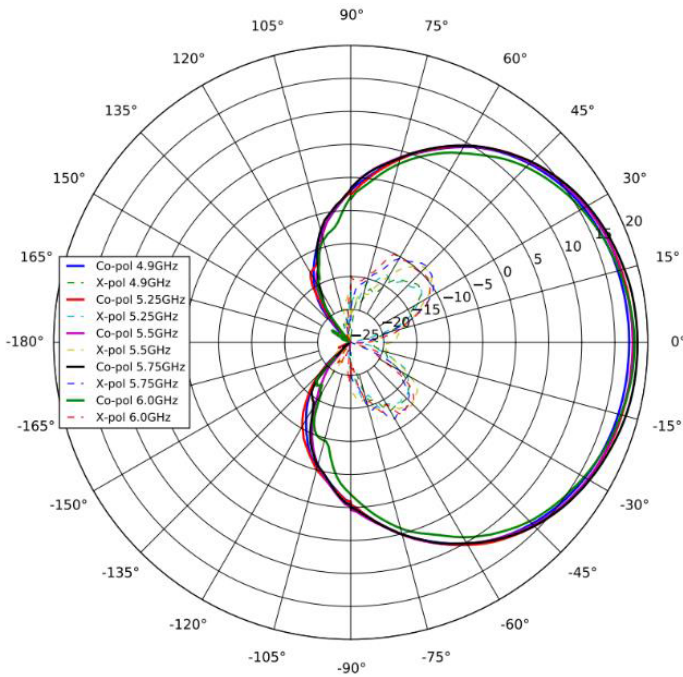

### 3 GHz ANTENNA PATTERN FOR INTEGRATED SECTOR:

