



# C3T (PoE)

## Be There for You, Rain or Shine

A bullet camera offering Full HD 1080p video for protection rain or shine.

## Key Features



FHD 1080p



Night Vision Up to  
100ft/30M



Dual-Stream



Waterproof Mic  
Pickup 16ft/5M



Support PoE  
Power supply



Dustproof and Waterproof  
IP66



## Quicker. Faster. Better.

Quicker processing, faster counting speed and better image processing.

Quicker  
Processing


Faster  
Counting  
Speed

Better Image  
Processing



## Easy PoE connectivity

Easily set up the C3T by connecting and powering it with the same Ethernet cord.

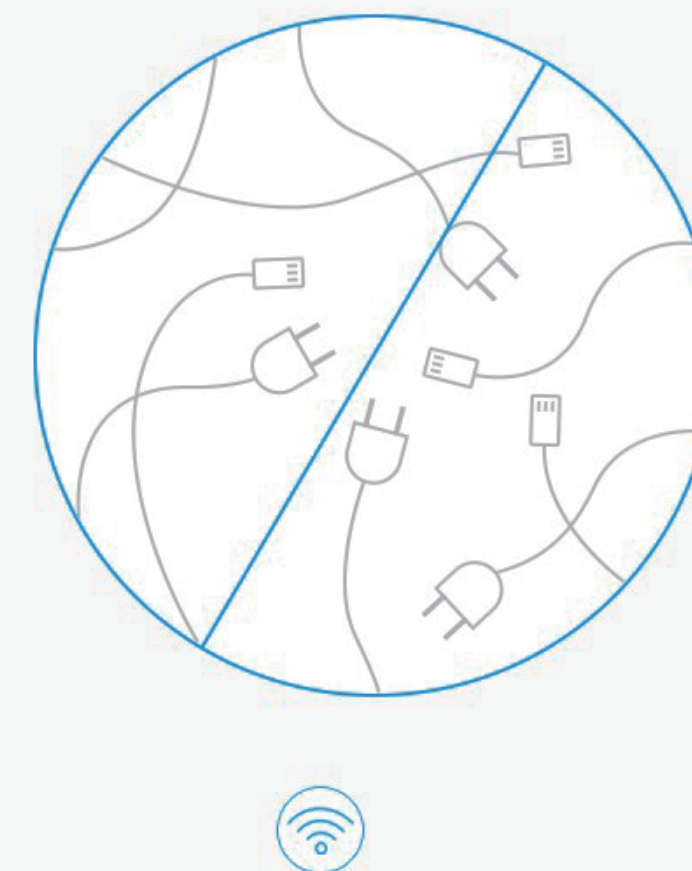



## Night vision

When the sun goes down, the C3T's night vision goes on for clear Full HD video in the dark up to 30 meters.



## See every detail

The high-definition, wide-angle lens not only provides more detail but also more coverage.





## Security for all seasons

With an IP66-rated weatherproof design, the C3T is a reliable and durable guard that can protect you in all types of weather: rain, sunshine or even snow.



## True-to-Life video

See video the way your eyes see it with digital WDR, which balances colors and light to match real life.



HDR Off



HDR On



# Specifications

Model CS-CV310-B0-1B2ER

## Camera

Image Sensor	1/2.7" 2MP Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	2.8mm@ F2.0, view angle:104° (Horizontal), 118°(Diagonal) 4mm@ F2.0, view angle:87° (Horizontal), 102°(Diagonal) 6mm@ F2.0, view angle:54° (Horizontal), 62°(Diagonal)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
DNR	3D DNR
WDR	Digital WDR

## Compression

Video Compression	H.264
H.264 Type	Main Profile
Video Bit Rate	HD; balance; and fluency. Adaptive bit rate.

## Image

Max. Resolution	1920x1080
Frame Rate	50Hz @ 25fps, 60Hz @ 30fps; adaptive frame rate of network transmission
Image setting	Brightness, contrast, saturation, etc. (Configure via EZVIZ Studio)
BLC	Support

## Network

Smart Alarm	Intelligent motion detection
Protocol	Ezviz cloud proprietary protocol
Interface Protocol	Ezviz cloud proprietary protocol
General Function	Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image, Password Protection, Wa-termark

## Interface

Wired network	1RJ45 Ethernet Port ,adaptive rate of 10/100Mbps Support PoE power supply, protocol IEEE 802.3af
---------------	---

## General

Operating Conditions	-22°F to 140 °F (-30°C ~ 60°C ), Humidity 95% or less ( non-condensing)
Power Supply	DC 12V±10%
Power Consumption	MAX. 6W
IP Grade	IP66
IR Range	MAX. 100ft
Dimensions (mm)	0.49ft x 0.23ft x 0.23ft (151mm x 71.6mm x 71.6mm)
Weight	0.734 lb (333g)



## Package Contents:

- C3T X 1
- Power Adapter X 1
- Mounting Template X 1
- Screw Kit X 1
- Waterproof Kit X 1
- Quick Start Guide X 1

## Requirements

- Operating Conditions: -30°C ~ 60°C, Humidity 95% or less (non-condensing)

## Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd.  
Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/eu>

**SICE DISTRIBUTORE UFFICIALE:** [www.sicetelecom.it](http://www.sicetelecom.it)