



C6C (ez360)

See Wherever You Want To See

A Wi-Fi pan-tilt camera with a 360° horizontal field of view.

Key Features

Full HD

720p/1080p



Smart lens shutter for privacy protection



Pan and Tilt. Up to 340° horizontal and 120° vertical.



Two-way audio



Supports smart motion tracking and recording



True Day/Night camera with auto-switching. Infrared night vision up to 10 meters.



Supports MicroSD card slot, up to 256GB



360° horizontal panorama

The C6C (ez360) includes an expansive field-of-view coverage with 340° horizontal, 105° vertical upward and 15° vertical downward rotations.

Smart tracking

Upon detection of movement, the C6C (ez360) automatically captures and tracks the motion while delivering alerts and video recording in real time.




Privacy shutter

The thoughtfully-designed privacy shutter allows you to turn the lens off whenever you need privacy.



Night vision

The C6C (ez360) is equipped with two powerful infrared lights for night vision up to 10 meters (depending on environment).

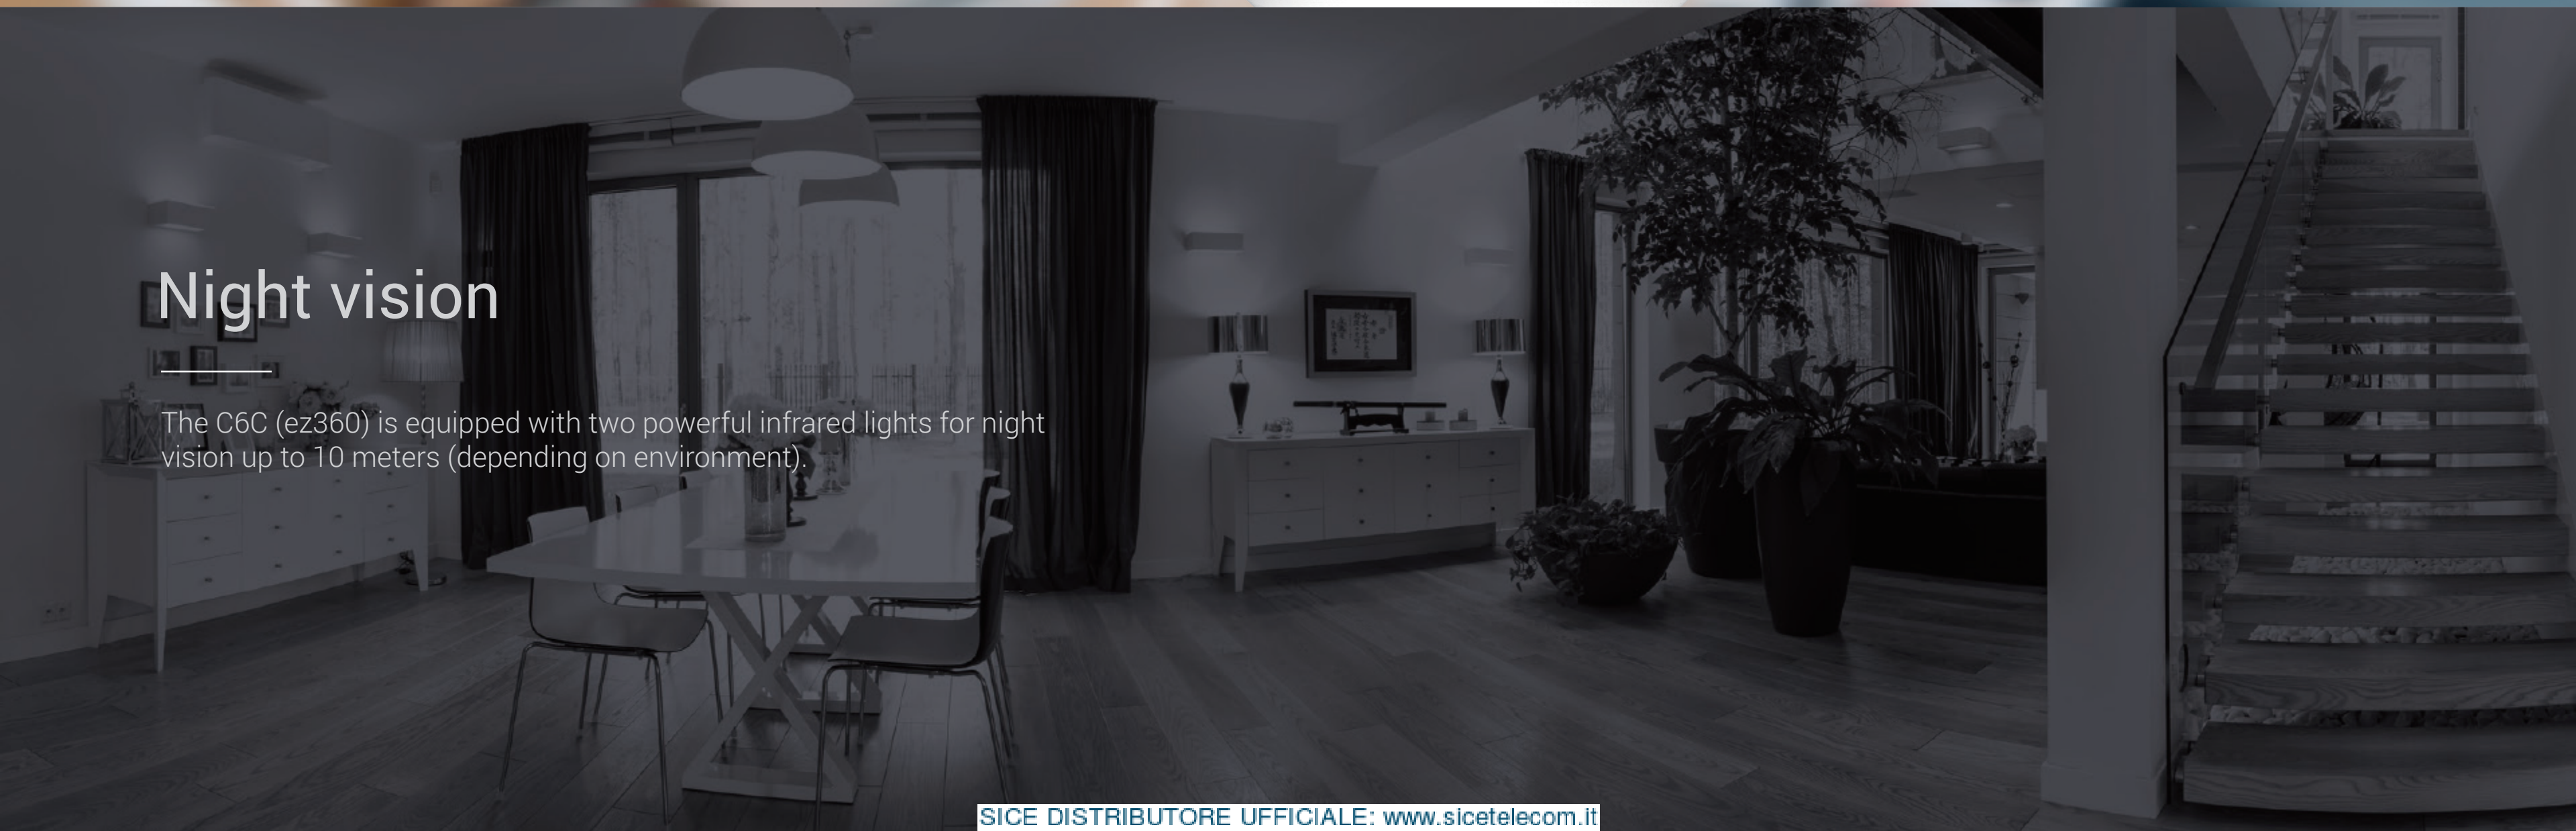


Integrates with EZVIZ alarm system



The C6C (ez360) can be integrated into EZVIZ alarm systems. Once an alarm is triggered, the camera will capture a picture and video footage and send them to the device owner.


Instant alerts (manual activation required)

The C6C (ez360) watches for movement. When motion is detected, it will take a picture and send alerts to your smartphone.

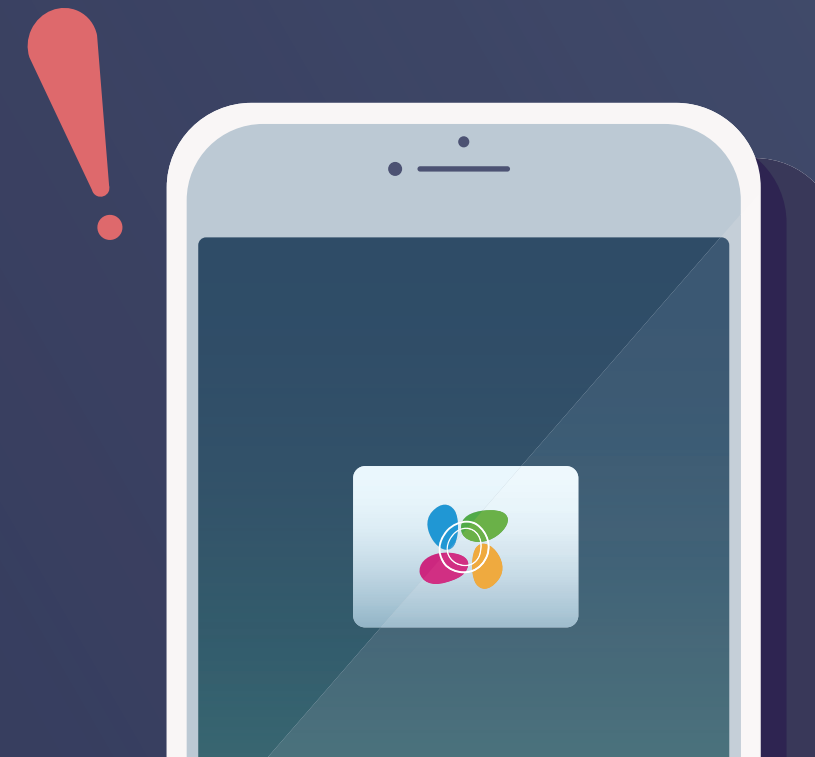

Two-way audio

The camera comes with a built-in microphone and HiFi quality speaker, enabling two-way audio via the camera and your phone or tablet.

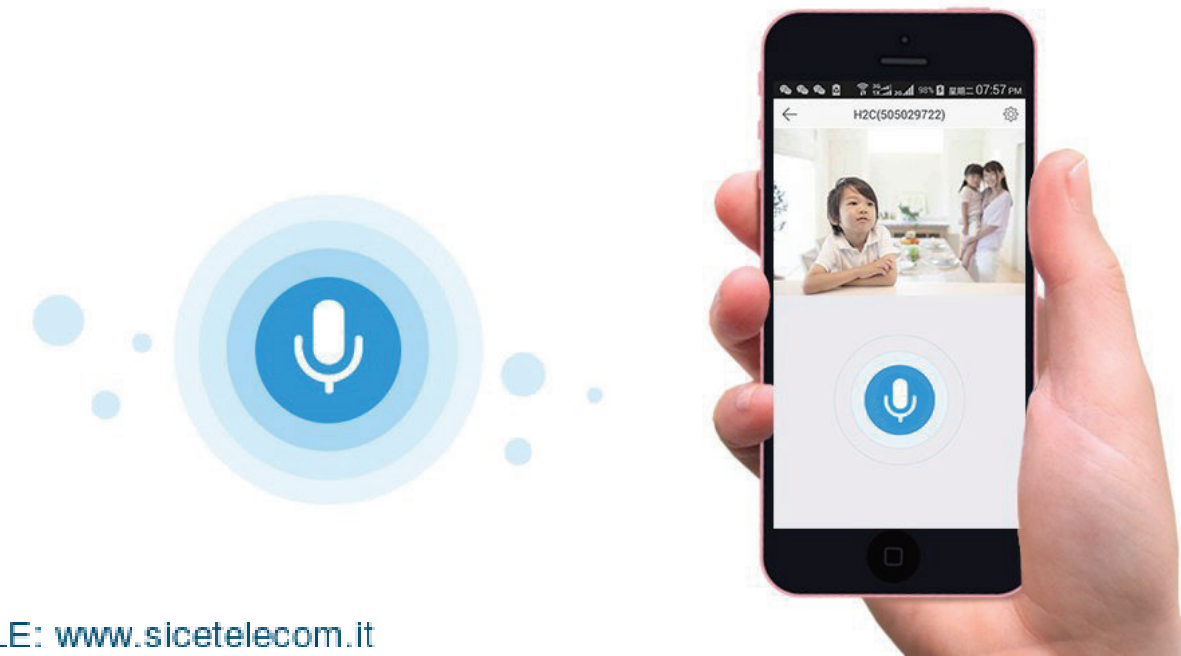

Specifications

Model CS-CV246-B0-3B1WFR/ CS-CV246-B0-3B2WFR

Camera

| | |
|---------------|---|
| Image Sensor | 1/4" Progressive Scan CMOS/ 1/2.7" Progressive Scan CMOS |
| Shutter Speed | Self-adaptive shutter |
| Lens | 4mm@ F2.2, view angle: 90° (Diagonal) |
| PT Angle | Pan: 340°, Tilt: 120° |
| Lens Mount | M12 |
| Day & Night | IR-cut filter with auto-switching |
| DNR | 3D DNR |
| WDR | Digital WDR |

Compression

| | |
|-------------------|-----------------------------------|
| Video Compression | H.264 |
| H.264 Type | Main Profile |
| Video Bit Rate | HD, Balanced and Smooth bit rate. |

Image

| | |
|-----------------|---|
| Max. Resolution | 1280×720/1920×1080 |
| Image Settings | Brightness, contrast, saturation, etc. (configurable via EZVIZ Studio) |
| BLC | Support |

Network

| | |
|------------------------------|---|
| Storage | Supports MicroSD card (max. 256GB) |
| Smart Alarm | Motion detection |
| Wi-Fi Pairing Protocol | SmartConfig (Wi-Fi One-Key Configuration)/AP pairing |
| Interface Protocol | EZVIZ Cloud proprietary protocol |
| General Features | Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror Image, Password Protection, Watermark |
| Minimum Network Requirements | 2Mbps |

Wi-Fi

| | |
|-------------------|--|
| Standard | IEEE802.11b, 802.11g, 802.11n |
| Frequency Range | 2.4 GHz ~ 2.4835 GHz |
| Channel Bandwidth | Supports 20MHz |
| Security | 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK |
| Transmission Rate | 11b: 11Mbps, 11g: 54Mbps, 11n: 135Mbps |

General

| | |
|----------------------|---------------------------|
| Power Supply | DC 5V±10% |
| Power Consumption | 5.5W MAX/7W MAX |
| IR Range | MAX. 10 meters |
| Product Dimensions | 87.7mm x 87.7mm x 112.7mm |
| Packaging Dimensions | 106mm x 106mm x 190mm |
| Weight | 256g |

Package Contents:

- C6C (ez360) X 1
- Base X 1
- 3 Meters Power Cable X 1
- Drill Template X 1
- Screw Kit X 1
- Power Adapter X 1
- Quick Start Guide X 1

Requirements

- Operating Conditions: -10°C ~ 45°C, Humidity 95% or less (non-condensing)

Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd.
Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/>

SICE DISTRIBUTORE UFFICIALE: www.sicetelecom.it