


# DS-2CE1582P(N)-IR


## 600 TVL DIS IR Bullet Camera

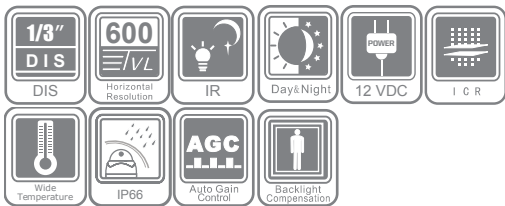

### Key features

- 600 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:  
-40°C to 60°C (-40°F to +140°F)

### Dimensions

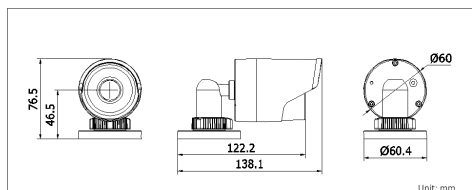

| DS-2CE1582P(N)-IR                |   |
|----------------------------------|---|
| Camera                           |   |
| Image Sensor                     | 1/3" DIS  |
| Signal System                    | PAL/NTSC  |
| Effective Pixels                 | 720 (H) × 480 (V)   |
| Min. Illumination                | 0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR                                   |
| Shutter speed                    | PAL: 1/25 s to 1/15,000 s<br>NTSC: 1/30 s to 1/15,000 s                   |
| Lens                             | 3.6 mm (2.8mm, 6 mm optional)<br>Angle of view: 68.4° (3.6 mm)            |
| Lens Mount                       | M12   |
| Angle Adjustment                 | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°                          |
| Day & Night                      | IR cut filter with auto switch  |
| Horizontal Resolution            | 600 TVL   |
| Synchronization                  | Internal synchronization  |
| Video Output                     | 1Vp-p composite output (75 Ω/BNC)   |
| S/N Ratio                        | More than 52 dB   |
| General                          |   |
| Working Temperature/<br>Humidity | -40 °C - 60 °C (-40 °F - 140 °F)<br>Humidity 90% or less (non-condensing) |
| Power Supply                     | 12 V DC   |
| Power Consumption                | Max. 2 W<br>(Max. 5 W with IR cut filter on)                              |
| Ingress Protection               | IP66  |
| IR Range                         | 20 meters   |
| Dimensions                       | Ø70x149.5 mm (Ø2.76" x 5.89")   |
| Weight                           | 360 g (0.79 lbs)  |

### Available models

PAL: DS-2CE1582P-IR  
NTSC: DS-2CE1582N-IR