


DS-2CE16C2P(N)-IT5

720 TVL PICADIS Outdoor IR Bullet Camera




EXIR

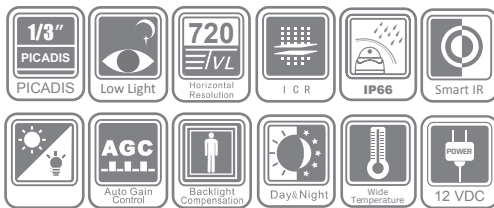

Key features

- 1/3" PICADIS
- EXIR Technology
- True Day/Night
- 720 TVL Horizontal Resolution
- 80m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

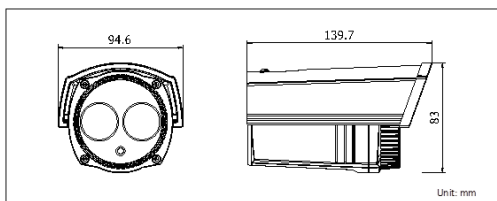

DS-2CE16C2P(N)-IT5	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280(H)×960(V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0 Lux with IR 0.3Lux @ (F2.3,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/10,000 s NTSC: 1/30 s to 1/10,000 s
Lens	16mm @ F2.3 (3.6mm,6mm,8mm,12mm optional) , Angle of view: 22.62° (12mm)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 7 W (Max. 9 W with IR cut filter on)
Ingress Protection	IP66
IR Range	80 meters
Dimensions	Φ99.9×87.8×157.3mm(3.93"×3.46"×6.19")
Weight	700 g (1.54 lbs)

Available models

PAL: DS-2CE16C2P-IT5
NTSC: DS-2CE16C2N-IT5

Accessories



DS-1212ZJ
(Wall Mount)



DS-1214ZJ
(Pole Mount)



DS-1215ZJ
(Pole Mount)