

## DS-D5040FC 40" Monitor

### Key Features


- Support 8bit/10bit 2-ch LVDS(1920 x 1080) HD display
- Adopt 3-D digital comb filter
- Support audio output
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.4 input interface, support HDCP
- Adopt 3D noise reduction technology
- Support high definition JPEG decoding
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge
- High reliable components for 7 x 24 working



### Model

DS-D5040FC

### Interfaces

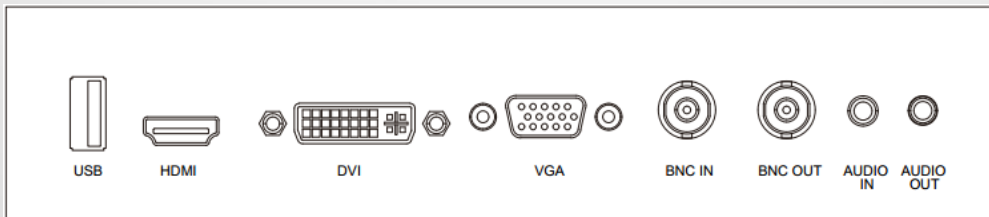

# DS-D5040FC 40" Monitor



## Specification

<b>Model</b>	<b>DS-D5040FC</b>	
<b>Display Type</b>	TFT-LED Backlight	
<b>Screen Size</b>	39.5"	
<b>Dot Pitch (H×V)</b>	0.15245 mm x 0.4494 mm	
<b>Max Resolution</b>	1920 x 1080	
<b>Brightness</b>	360 cd/m <sup>2</sup>	
<b>Contrast</b>	5000 : 1	
<b>Response Time</b>	9.5 ms	
<b>Color</b>	16.7 M	
<b>Viewable Area (H×V)</b>	878.112 mm x 485.352 mm	
<b>Viewing Angle</b>	Horizontal 178°, Vertical 178°	
<b>Interfaces</b>	DVI Input	1
	VGA Input	1
	HDMI Input	1
	USB	1
	BNC Input	1
	BNC Output	1
	PC AUDIO-IN	1, 3.5 mm mini-jack
	PC AUDIO-OUT	1, 3.5 mm mini-jack
<b>Speaker</b>	2W x 2, 6Ω	
<b>Power Supply</b>	100 ~ 240 V AC, 50/60 Hz	
<b>Power Consumption</b>	≤ 60W	
<b>Operation Temperature</b>	0°C ~ 40°C	
<b>Operation Humidity</b>	10%~85%	
<b>Storage Temperature</b>	-20°C ~ 55°C	
<b>Storage Humidity</b>	5%~95%	
<b>Dimension (W×H×D)</b>	908.4 mm x 516.9 mm x 47.8 mm	
<b>Package Dimension (W×H×D)</b>	988 mm x 598 mm x 193 mm	
<b>Weight</b>	11 Kg(Gross weight) , 8.5 Kg(Net weight)	
<b>Included Accessories</b>	power cord x 1, VGA cable x 1, HDMI x 1, Remote control x 1, battery x 2, user manual x 1, warranty card x 1	

# DS-D5040FC 40" Monitor



## Dimension (mm)

