CRS328-4C-20S-4S+RM

The CRS328-4C-20S-4S+RM is a 28 independent port switch with a combo group.

This device has twenty SFP ports, four SFP+ ports for 10G modules and four combo ports, where you can choose to use SFP or RJ45 ports from the combo group. These ports can also be software selected, so if you have plugged in all eight cables, you can use scripting, to decide which four combo ports will be active.

The device comes in a 1U rackmount case with two 100-240 V power supplies with failover functionality. A RJ45 console port is available for management and debugging, and a mode button can be customised to execute any RouterOS commands.

The device has a “Dual boot” feature that allows you to choose between two operating systems - RouterOS or SwOS.


If you prefer to have a simplified operating system with only switch specific features, use SwOS. If you would like the ability to use routing and other Layer 3 features in your CRS, use RouterOS. You can select the desired operating system from RouterOS, from SwOS or from the RouterBOOT loader settings. All the feature set comes with our disruptive price, providing best price/performance on the market.

Switching features

- Non-blocking Layer 2 switching capacity
- 16K host table
- IEEE 802.1Q VLAN
- Supports up to 4K simultaneous VLANs
- Port isolation
- Port security
- Broadcast storm control
- Port mirroring of ingress/egress traffic
- STP / RSTP / MSTP
- Access Control List
- MikroTik neighbor discovery
- SNMP
- 10218-byte jumbo frames support
- IGMP snooping
- IEEE 802.3ad and static link aggregation

Quick specifications


- 20 SFP ports
- 4 ETH/SFP combo ports
- 4 SFP+ ports
- Non-Blocking throughput: 64 Gbps
- Switching capacity: 128 Gbps
- Forwarding rate: 95.2 Mpps
- RJ45 serial console port
- Dual PSU
- Maximum power consumption: 43 W
- Temperature based fan control
- 1U rackmount

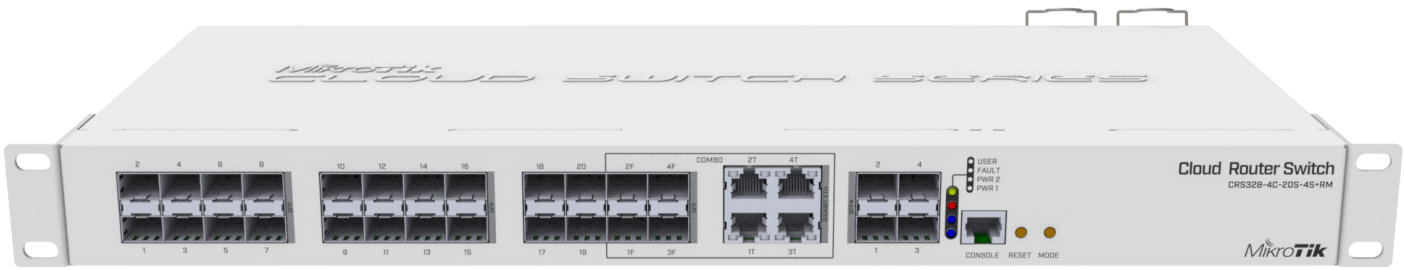

SICE DISTRIBUTORE UFFICIALE: www.sicetelecom.it

Specifications

Product code	CRS328-4C-20S-4S+RM
CPU	98DX3236A1 800 MHz
RAM	512 MB
Storage type	Flash
Storage size	16 MB
Switch chip model	98DX3236A1
SFP cages	20
SFP+ cages	4
Ethernet/SFP Combo ports	4
Operating system	SwOS / RouterOS (Dual boot)
Supported input voltage	100 - 240 V
Dimensions	443 x 200 x 44 mm
Operating temperature	-20°C .. +60°C tested
Max power consumption	43 W
Serial port	RJ45
License level	5

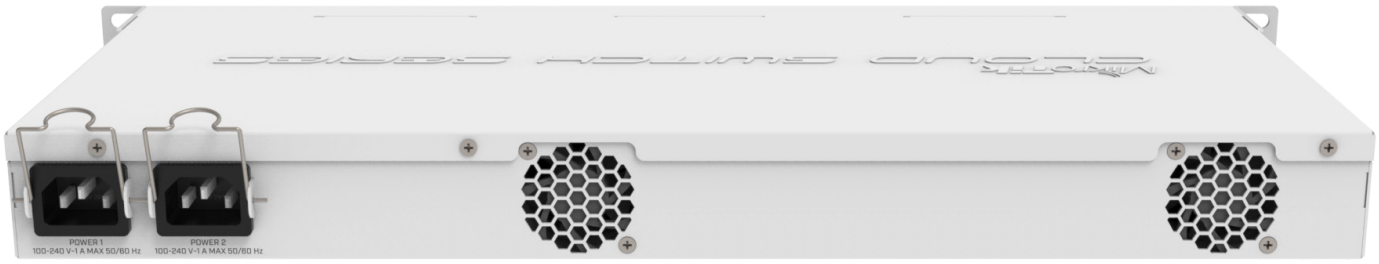



Two IEC power cords



Rack ears

SICE DISTRIBUTORE UFFICIALE: www.sicetelecom.it