

mANTBox 52 15s

A dual-band 2.4/5 GHz base station with a powerful built-in sector antenna, PoE support, Gigabit Ethernet and SFP.

One powerful package for all your outdoor network needs, perfect for camps, stadiums and parks!



Strong dual-chain dual-band
2.4/5 GHz Wireless



Gigabit Ethernet



SFP for fiber connectivity



iOS/Android app for quick
and easy configuration



Quad-core CPU



Powerful built-in dual
polarization antenna



802.3af/at PoE-in



Distance up to
20 km



IPsec hardware
offloading




Extreme versatility with
the powerful RouterOS



Are you managing an outdoor wireless network with a variety of access points and CPE devices? Then our brand new mANTBox 52 15s has got you covered – offering powerful built-in antennas, fascinating connectivity options and more!

Creating an efficient point-to-multipoint connection used to be tricky, but not anymore: mANTBox 52 15s works well in any setup. The dual-band wireless capability allows you to use both 2.4 GHz and 5 GHz devices at the same time. There is a Gigabit Ethernet port and an SFP port for fiber connections.

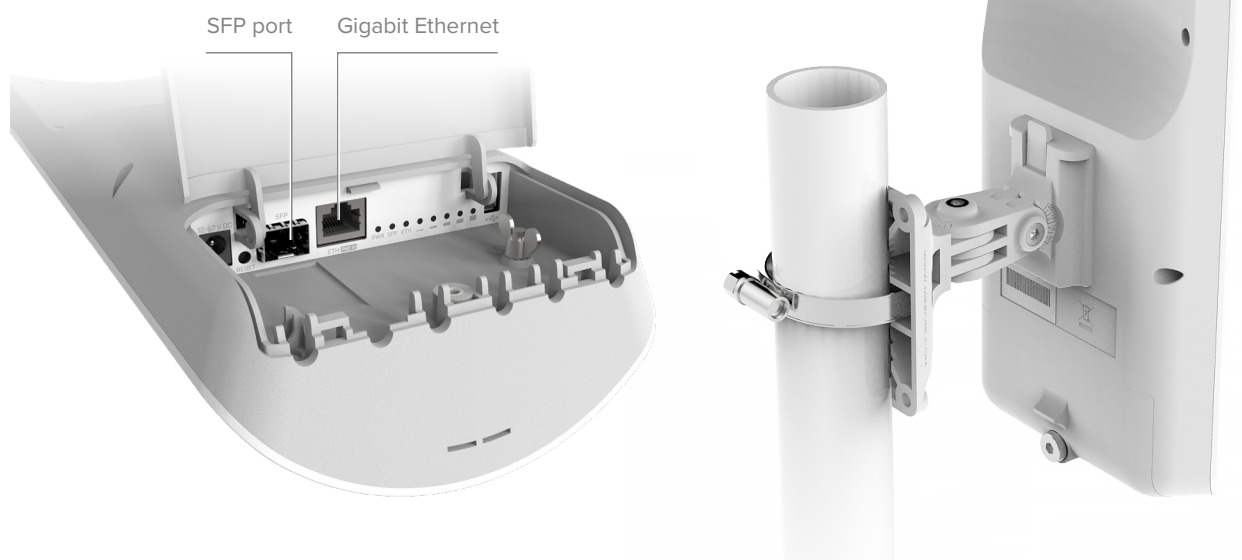


With mANTBox 52 15s you don't have to worry about power options – it supports 802.3af/at PoE-in. There is a Gigabit PoE injector and a standard DC power adapter included.

We have doubled the RAM and added a new quad-core CPU that can handle even the heaviest loads. mANTBox 52 15s can even provide IPsec hardware offloading without trouble. Depending on the rest of your setup, you can reach distance up to 20 km with the built-in dual polarization antenna.

/ You can't go wrong with the mANTBox 52 15s – it is fast, powerful and easy to use in any P2MP setup!

mANTBox package includes everything you need: a Gigabit PoE injector, a power supply, a hose clamp and a fastening set, and the MikroTik quickMOUNT pro. This advanced wall mount adapter allows turning antenna within 140° both horizontally and vertically. With the quickMOUNT pro it is possible to perfectly set antenna alignment using an integrated graduated scale.

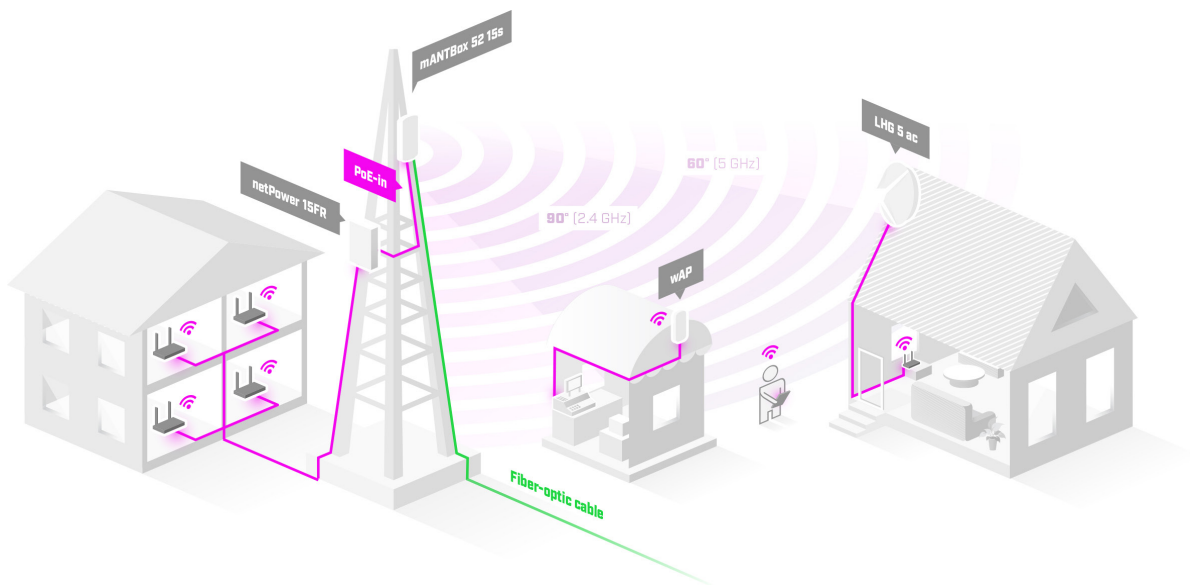

RouterOS – extreme versatility

Run a secure VPN from the office directly to your home, enable parental control, Quality of Service (traffic prioritization for certain needs, such as streaming), specific firewall rules, IPsec hardware acceleration, VLAN, DHCP, e-mail or SMS notifications, and so on. With RouterOS scripting you can automate a lot:

- modify queues based on bandwidth usage;
- complex trigger notifications, such as “Your bandwidth has reached X for Y minutes!”
- backups and setup of additional devices, and so much more!

If you can imagine it – RouterOS can achieve it. You can even install RouterOS on a PC or a virtual machine for even more networking experiments!

We also include a free handy tool for centralized management of all your wireless MikroTik devices – the CAPsMAN. Unlike traditional controller software, CAPsMAN doesn’t require a separate device to run, it can use any existing RouterOS device in your network.

We have been making our own software since 1996. With each new version our priority remained the same: to provide users with the freedom to explore different setups and always have the right tools for the job. Without unnecessary paywalls.

Specifications

| | |
|---|--|
| Product code | RBD22UGS-5HPacD2HnD-15S |
| CPU | 4 core IPQ-4019 716 MHz |
| Size of RAM | 256 MB |
| Storage | 16 MB flash |
| Number of 1GbE ports | 1 |
| Number of 1G SFP ports | 1 |
| Wireless | 2.4 GHz 802.11b/g/n dual-chain, 5 GHz 802.11a/n/ac dual-chain |
| Wireless regulations | Specific frequency range can be limited by country regulations |
| PCB temperature monitor | Yes |
| Voltage monitor | Yes |
| USB port | USB type A |
| Operating system | RouterOS, License level 4 |
| Antenna gain | 12 dBi (2.4 GHz), 15 dBi (5 GHz) |
| Antenna beam width | 90° (2.4 GHz), 60° (5 GHz) |
| Polarization | Vertical and horizontal |
| Tested ambient temperature | -40°C to +70°C |
| Max power consumption without attachments | 15 W |
| Max power consumption | 21 W |
| Dimensions | 140 x 348 x 82 mm |

Powering

| | |
|-------------------------------|---------------------|
| PoE-in | 802.3af/at |
| PoE-in input voltage | 12-57 V |
| Number of DC inputs | 2 (PoE-in, DC jack) |
| DC jack input voltage | 12-57 V |
| Power adapter nominal voltage | 48 V |
| Power adapter nominal current | 0.95 A |

Certification & Approvals

| | |
|---------------|-----------------|
| Certification | CE, FCC, IC, IP |
|---------------|-----------------|

Included parts



48 V 0.95 A
power adapter



K-41 fastening set



PoE injector



Hose clamp




quickMOUNT pro

Wireless specifications


| Rate (2.4 GHz) | Tx (dBm) | Rx (dBm) |
|----------------|----------|----------|
| 1MBit/s | 30 | -100 |
| 11MBit/s | 30 | -94 |
| 6MBit/s | 30 | -96 |
| 54MBit/s | 27 | -80 |
| MCS0 | 30 | -96 |
| MCS7 | 26 | -75 |

| Rate (5 GHz) | Tx (dBm) | Rx (dBm) |
|--------------|----------|----------|
| 6MBit/s | 30 | -96 |
| 54MBit/s | 27 | -80 |
| MCS0 | 30 | -96 |
| MCS7 | 26 | -75 |
| MCS9 | 23 | -72 |


Antenna patterns 2.4 GHz




HP elevation



VP elevation




HP azimuth




VP azimuth


Antenna patterns 5 GHz




HP elevation



VP elevation



HP azimuth



VP azimuth