

# UltraDish<sup>™</sup> TP 550


## DIRECTIONAL PARABOLIC DISH ANTENNA WITH TWISTPORT™ CONNECTOR

UltraDish™ TP 550's are designed for CPE or PtP connections. The antenna reflector is made from an aluminum alloy to ensure a very uniform shape. Our virtually lossless TwistPort™ connector guarantees easy radio deployment and maintenance.

Antenna installation is extremely easy and ensures rapid deployment for large scale projects. Our innovative antenna mount fits a wide range of pole diameters and can be easily swapped for right or left side mounts. A single HEX tool is all you need to perform your installation.



#### Azimuth Pattern H Elevation Pattern H Gain H 30 28 26 24 20 18 16 14 12 10 120 120 120 120 8 6 5.1 5.2 5.3 5.4 5.5 5.7 5.8 5.9

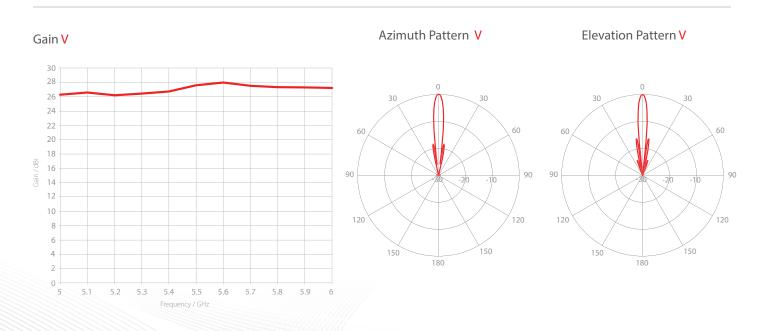

1/2 UltraDish™TP SEP-2016

RF elements®, UltraDish™ TP and TwistPort™ are trademarks of RF elements s.r.o., Humenne, Slovakia. All rights of respective trademark owners reserved. © RF elements 2016

### **Product Datasheet**



#### **PHYSICAL**

Antenna Connection	TwistPort™ - Quick Locking Waveguide Port
Antenna Type	Parabolic Dish
Enviromental	IP65
Pole Mounting Diameter	15-86 mm
Temperature	-40 to +60 °C (-40°F to +140°F)
Wind Survival	160 Km/h
Weight	3.7 Kg / 8 lbs* – single unit N/A Kg / lbs – single unit incl. package
Single Unit	Retail Box: N/A

 $<sup>\</sup>hbox{\tt\#Estimation based on pre-production units. Subject to change}.$ 

#### **COMPATIBLE WIRELESS PLATFORMS**

any TwistPort™ Adaptor

any SIMPER™ Radio

#### PRODUCT DIMENSIONS



	Gain	27.5 dBi
	Azimuth Beam Width -6 dB	H 8° / V 8.5°
	Elevation Beam Width -6 dB	H 8.5° / V 8°
	Azimuth Beam Width -3 dB	H 6°/V 6.5°
	Elevation Beam Width -3 dB	H 6.5°/V 6°
	Front-to-Back Ratio (Min)	37 dB

