



# DATASHEET



## Unified Video Surveillance Management

Camera Models: UVC, UVC-Dome, UVC-Micro, UVC-Pro  
NVR Model: UVC-NVR

Scalable Day or Night Surveillance

Advanced Hardware with Full HD Video

Powerful Features and Analytic Capabilities



SICE DISTRIBUTORE UFFICIALE: [www.sicetelecom.it](http://www.sicetelecom.it)

# UniFi® VIDEO

## Cameras



The UniFi® Video Camera provides 720p HD resolution at 30 FPS and is designed for use indoors or outdoors under an overhang. The camera has infrared LEDs with automatic IR cut filter. It is available in a single-pack or 3-pack.

- 720p HD, 30 FPS
- Built-in Microphone
- Wall, Ceiling, or Pole Mount
- Powered through Ethernet



Designed for indoor use, the UniFi® Video Camera Dome discreetly integrates into any ceiling surface. The camera features a wide-angle lens and provides 720p HD resolution at 30 FPS. The camera has infrared LEDs with automatic IR cut filter. It is available in a single-pack or 3-pack.

- 720p HD, 30 FPS
- Wide-Angle Lens
- Built-in Microphone
- Powered through Ethernet



## Cameras



The UniFi Video Camera Pro has a weatherproof design that is ideal for outdoors but can also be used indoors. It features full 1080p HD resolution. The camera has a 3x optical zoom and infrared LEDs with automatic IR cut filter. It is available in a single-pack.

- 1080p Full HD, 25 FPS
- 1/3" Wide Dynamic Range (WDR) Sensor
- Wall, Ceiling, or Pole Mount
- Powered through Ethernet, 802.3af Compatible



About the size of a golf ball, the UniFi Video Camera Micro provides 720p HD resolution at 30 FPS. The UniFi® Video Camera Micro is designed for use indoors. A magnetic base is used for power transfer and 3-axis viewing adjustment. Mount it magnetically on a metal surface, or integrate it seamlessly into any corner, wall, or ceiling.

The UniFi Video Micro features Dual-Band 2.4 GHz and 5 GHz Wi-Fi connectivity for streaming HD video. The camera has infrared LEDs with automatic IR cut filter. It is available in a single-pack or 3-pack.

- 720p HD, 30 FPS
- Built-in Microphone
- Wall, Ceiling, or Corner Mount
- Dual-Band Wi-Fi Connectivity





## Accessories

### Dedicated Hardware NVR with UniFi Video software pre-installed

The UniFi NVR is a plug-and-play NVR appliance with low power consumption. The UniFi Video software is pre-installed for quick and easy deployment. No additional software is required. Plug it into the network, go through the configuration wizard, and it is set up and ready to go.

The UniFi NVR has a built-in 500 GB hard drive. This equates to approximately 1200 recording hours at 480p resolution or 400 recording hours at 720p resolution (numbers can vary depending on the frame rate).



### Large Pole-Mount Accessory for UniFi Video Camera PRO

The UniFi Video Camera PRO Large Pole Mount, model UVC-Pro-M, accommodates larger poles up to 160 mm wide and mounts one or two UniFi Video Camera PRO devices on a single pole.

- Industrial-Grade Metal Mount
- Fits up to 160 mm Diameter Poles
- Mounts One or Two Cameras



### UniFi Video Camera PRO Cable Accessory

The UniFi Video Camera PRO Cable Accessory, model UVC-Pro-C, is designed for use with the UVC PRO. In addition to the convenient Reset button, the UVC PRO Cable Accessory provides Ethernet, Audio In/Out, and mFi RJ45 connectors.





## Software

The UniFi Video software is pre-installed on the UniFi NVR for quick and easy deployment. The UniFi Video software can also be downloaded and installed on a Windows/Linux system\*.

### Features

**Feature-Packed User Interface** Accessible from a web browser, the UniFi Video interface was designed to be easy to use yet packed with advanced features. The UniFi Video interface is incredibly intuitive and loaded with powerful features such as detailed statistical reporting, multiple views, versatile camera settings, advanced analytics, and customizable event recordings.

**Plug and Play Installation** Automatic camera detection in the UniFi Video software makes it easy to install and deploy cameras. UniFi Video Camera settings are integrated into the UniFi Video software. Configure camera settings, reboot the camera, or upgrade the firmware from the UniFi Video interface.

**Mobile Support** The UniFi Video web interface is accessible on iOS and Android tablets and phones.


**Camera-Based Motion Detection** The UniFi Video cameras handle motion detection instead of the server, relieving the workload on the server and ensuring that compression and noise won't affect motion detection.

**Additional Live Views** Playlists can be created with a configurable live camera feed rotation. Define the cameras you want included in the playlist and how long you want them to appear on the screen before moving on to the next live feed.

**Disk Management Features** UniFi Video has automatic recording management to free up disk space. User-definable disk space and date-based auto purge allow users to keep a set amount of free disk space or automatically delete recordings after a certain number of days. Another storage feature is the ability to map external USB or network storage drives.


**Cost-Effective Solution** Shattering conventional industry thinking, Ubiquiti offers UniFi Video's powerful IP surveillance software at no additional cost. No huge upfront costs, no monthly subscription fees.

\* UniFi Video can be installed on a 64-bit Microsoft Windows 8/7, Ubuntu 12.04 (or above), or Debian 7.0 (or above) system with an Intel or compatible 1.86 GHz (or above) processor and a minimum of 2 GB RAM.

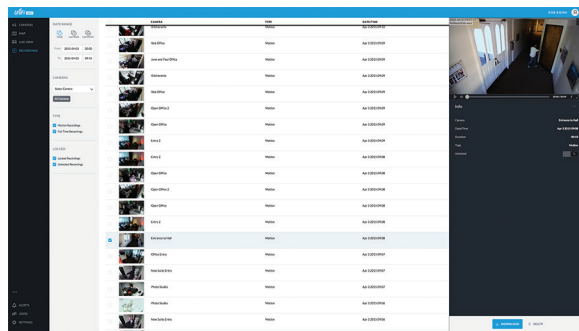


### Event Recordings

UniFi Video software provides a variety of options and settings to customize what your cameras record.

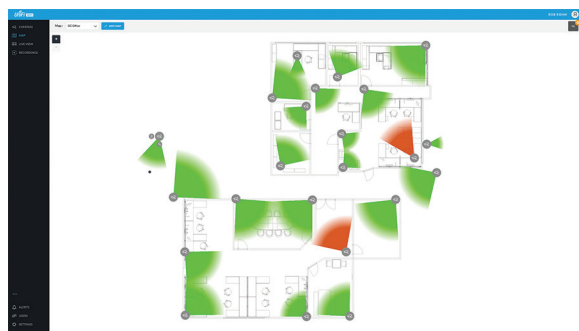

### Maps

Upload a map of your location(s) or use Google Maps to represent the areas where your cameras are located.

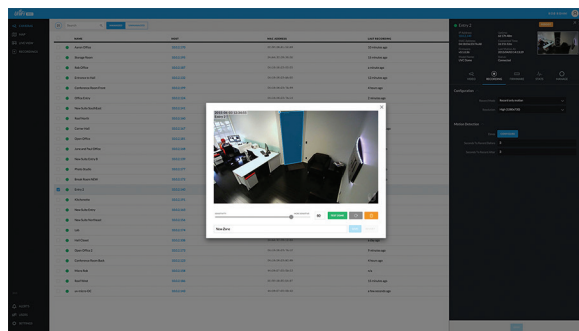

### Powerful Analytic Capabilities

Customize your own motion detection zones. You can place several zones and set their alarm sensitivity levels as high or low as the situation demands.



## Specifications

| NVR Specifications  |                                         |
|---------------------|-----------------------------------------|
| Dimensions          | 135 x 190 x 25 mm (5.31 x 7.48 x 0.98") |
| Weight              | 483 g (17 oz)                           |
| Processor           | Intel J1880                             |
| Memory              | 4 GB                                    |
| Hard Drive Capacity | 500 GB                                  |
| Ports               | (1) 10/100/1000 Ethernet                |
| Power Supply        | 65 W, 19V, 3.42A                        |
| Certifications      | CE, FCC, IC                             |

| UniFi Video Software Specifications |                                                                                                                                                           |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Software                            | Browser-Based Interface, Tablets, and Smartphones Supported                                                                                               |
| System Setup                        | Plug-and-Play Installation, Automatic Camera Detection                                                                                                    |
| NVR Camera Support                  | Recommended for up to 20 UniFi Video Cameras. Supports up to 50                                                                                           |
| Supported Devices                   | Operating Systems: Windows, Apple, and Linux<br>Browsers: Chrome, Internet Explorer 10 (or above), Firefox, and Safari<br>Smartphones: iPhone and Android |
| Media Format                        | MP4 (H.264/AAC)                                                                                                                                           |
| Scheduling                          | Day/Time/Camera<br>Scheduled Video Recording/Motion Detection/Email Alerts                                                                                |
| Views                               | Custom Views of Multiple Cameras<br>Full Screen Capability                                                                                                |



## Specifications

| UVC-Micro Specifications  |                                                                          |
|---------------------------|--------------------------------------------------------------------------|
| Dimensions                | 40.7 x 40.8 mm (1.60 x 1.61") - Camera Body with Base, Diameter x Height |
| Weight                    | Camera Body and Base 53 g (1.87 oz.), Power Cord 65 g (2.29 oz.)         |
| Microphone                | Yes                                                                      |
| Sensor                    | Progressive Scan RGB CMOS 1/4"                                           |
| Lens                      | EFL=2.38 mm / F2.4                                                       |
| Night Mode                | IR LED with Mechanical IR Cut Filter                                     |
| Buttons                   | Factory Reset Button                                                     |
| LED                       | Blue                                                                     |
| Power Method              | Adapter (5.5V)                                                           |
| Power Supply              | 5.5V Adapter with 5 m Cable                                              |
| Maximum Power Consumption | 3.2W                                                                     |
| Certifications            | CE, FCC, IC                                                              |
| Mounting                  | Wall/Ceiling/Corner Adapter Kit Included                                 |
| Operating Temperature     | 0 to 35° C (32 to 95° F)                                                 |
| Operating Humidity        | 20 - 90% Noncondensing                                                   |

| Video              |                                                                        |
|--------------------|------------------------------------------------------------------------|
| Video Compression  | H.264                                                                  |
| Resolution         | 720p HD (1280 x 720)                                                   |
| Maximum Frame Rate | 30 FPS                                                                 |
| Image Setting      | Brightness, Contrast, Sharpness, Saturation, Noise Reduction, 50/60 Hz |

| General              |                                        |
|----------------------|----------------------------------------|
| Processor            | ARM 1136J-S 528 MHz                    |
| Memory               | 256 MB DDR3                            |
| Networking Interface | Dual-Band Wi-Fi                        |
| View Angle           | 54.15° (V)<br>79.13° (H)<br>88.45° (D) |



# Specifications



| UVC Specifications        |                                             |
|---------------------------|---------------------------------------------|
| Dimensions                | 225 x 75 x 75 mm (8.85 x 2.95 x 2.95")      |
| Weight                    | 373 g (13.1 oz)                             |
| Ports                     | (1) 10/100 Ethernet Port, microSD Card Slot |
| Sensor                    | Progressive Scan RGB 1/4" CMOS Image Sensor |
| Lens                      | 3.6 mm/F1.8                                 |
| Power LED                 | Amber                                       |
| Link/Activity LED         | Green                                       |
| Night Mode                | IR LED with Mechanical IR Cut Filter        |
| Microphone                | Yes                                         |
| Buttons                   | Factory Reset Button                        |
| Power Method              | Passive Power over Ethernet (12-24V)        |
| Power Supply              | 24V, 0.5A PoE Adapter Included              |
| Maximum Power Consumption | 4.5 W                                       |
| Certifications            | CE, FCC, IC                                 |
| Mounting                  | Pole/Wall/Ceiling                           |
| Operating Temperature     | -30 to 50° C (-22 to 122° F)                |
| Operating Humidity        | 20 - 90% Noncondensing                      |

| Video              |                                                                        |
|--------------------|------------------------------------------------------------------------|
| Video Compression  | H.264                                                                  |
| Resolution         | 720p HD (1280 x 720)                                                   |
| Maximum Frame Rate | 30 FPS                                                                 |
| Image Setting      | Brightness, Contrast, Sharpness, Saturation, Noise Reduction, 50/60 Hz |

| General    |                                        |
|------------|----------------------------------------|
| Processor  | ARM 1136J-S, 528 MHz                   |
| Memory     | 256 MB DDR3                            |
| View Angle | 56.14° (H)<br>36.86° (V)<br>64.33° (D) |







## Specifications

| UVC-Dome Specifications   |                                        |
|---------------------------|----------------------------------------|
| Dimensions                | 111 x 96 x 96 mm (4.4 x 3.8 x 3.8")    |
| Weight                    | 178 g (6.28 oz)                        |
| Ports                     | (1) 10/100 Ethernet, MicroSD Card Slot |
| Sensor                    | 1/4" CMOS Image Sensor                 |
| Lens                      | 1.96 mm/F2.0                           |
| Power LED                 | Amber                                  |
| Link/Activity LED         | Green                                  |
| Night Mode                | IR LED with Mechanical IR Cut Filter   |
| Microphone                | Yes                                    |
| Buttons                   | Factory Reset Button                   |
| Power Method              | Passive Power over Ethernet (12-24V)   |
| Power Supply              | 24V, 0.5A PoE Adapter Included         |
| Maximum Power Consumption | 4 W                                    |
| Certifications            | CE, FCC, IC                            |
| Mounting                  | Ceiling Mount                          |
| Operating Temperature     | 0 to 40° C (32 to 104° F)              |
| Operating Humidity        | 20 - 90% Noncondensing                 |

| Video              |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Video Compression  | H.264                                                                                |
| Resolution         | 720p HD (1280 x 720)                                                                 |
| Maximum Frame Rate | 30 FPS                                                                               |
| Image Setting      | Brightness, Contrast, Sharpness, Saturation, Mirror, Flip, Noise Reduction, 50/60 Hz |

| General              |                                     |
|----------------------|-------------------------------------|
| Processor            | ARM 1136J-S 528 MHz                 |
| Memory               | 256 MB DDR3                         |
| Flash Memory Support | (1) MicroSD Card Slot               |
| View Angle           | 88.8° (H)<br>63.0° (V)<br>98.2° (D) |






## Specifications

| UVC-PRO Specifications    |                                                  |
|---------------------------|--------------------------------------------------|
| Dimensions                | 322 x 100 x 100 mm (12.67 x 3.93 x 3.93")        |
| Weight                    | 2.15 kg (4.73 lbs)                               |
| Ports                     | (1) 10/100 Ethernet                              |
| Sensor                    | 1/3" WDR Sensor                                  |
| Lens                      | 3x Optical Zoom, F= 3-9 mm                       |
| Night Mode                | IR LED with Mechanical IR Cut Filter             |
| Buttons                   | Factory Reset Button                             |
| Power Method              | Passive Power over Ethernet (48V, 0.5A), 802.3af |
| Power Supply              | 48V, 0.5A PoE Adapter Included                   |
| Maximum Power Consumption | 12.5 W                                           |
| Certifications            | CE, FCC, IC                                      |
| Mounting                  | Pole/Wall/Ceiling Adapter Kit Included           |
| Protection Rating         | IP67, Water and Dust Resistant                   |
| Operating Temperature     | -40 to 50° C (-40 to 122° F)                     |
| Operating Humidity        | 20 - 90% Noncondensing                           |

| Video              |                                                                        |
|--------------------|------------------------------------------------------------------------|
| Video Compression  | H.264                                                                  |
| Resolution         | 1080p Full HD                                                          |
| Maximum Frame Rate | 25 FPS                                                                 |
| Image Setting      | Brightness, Contrast, Sharpness, Saturation, Noise Reduction, 50/60 Hz |

| General    |                                                                         |
|------------|-------------------------------------------------------------------------|
| Processor  | ARM 1136J-S 528 MHz                                                     |
| Memory     | 256 MB DDR3, 256 MB Flash                                               |
| View Angle | 44.4° W - 15.7° T (V)<br>81.0° W - 27.9° T (H)<br>94.0° W - 32.1° T (D) |



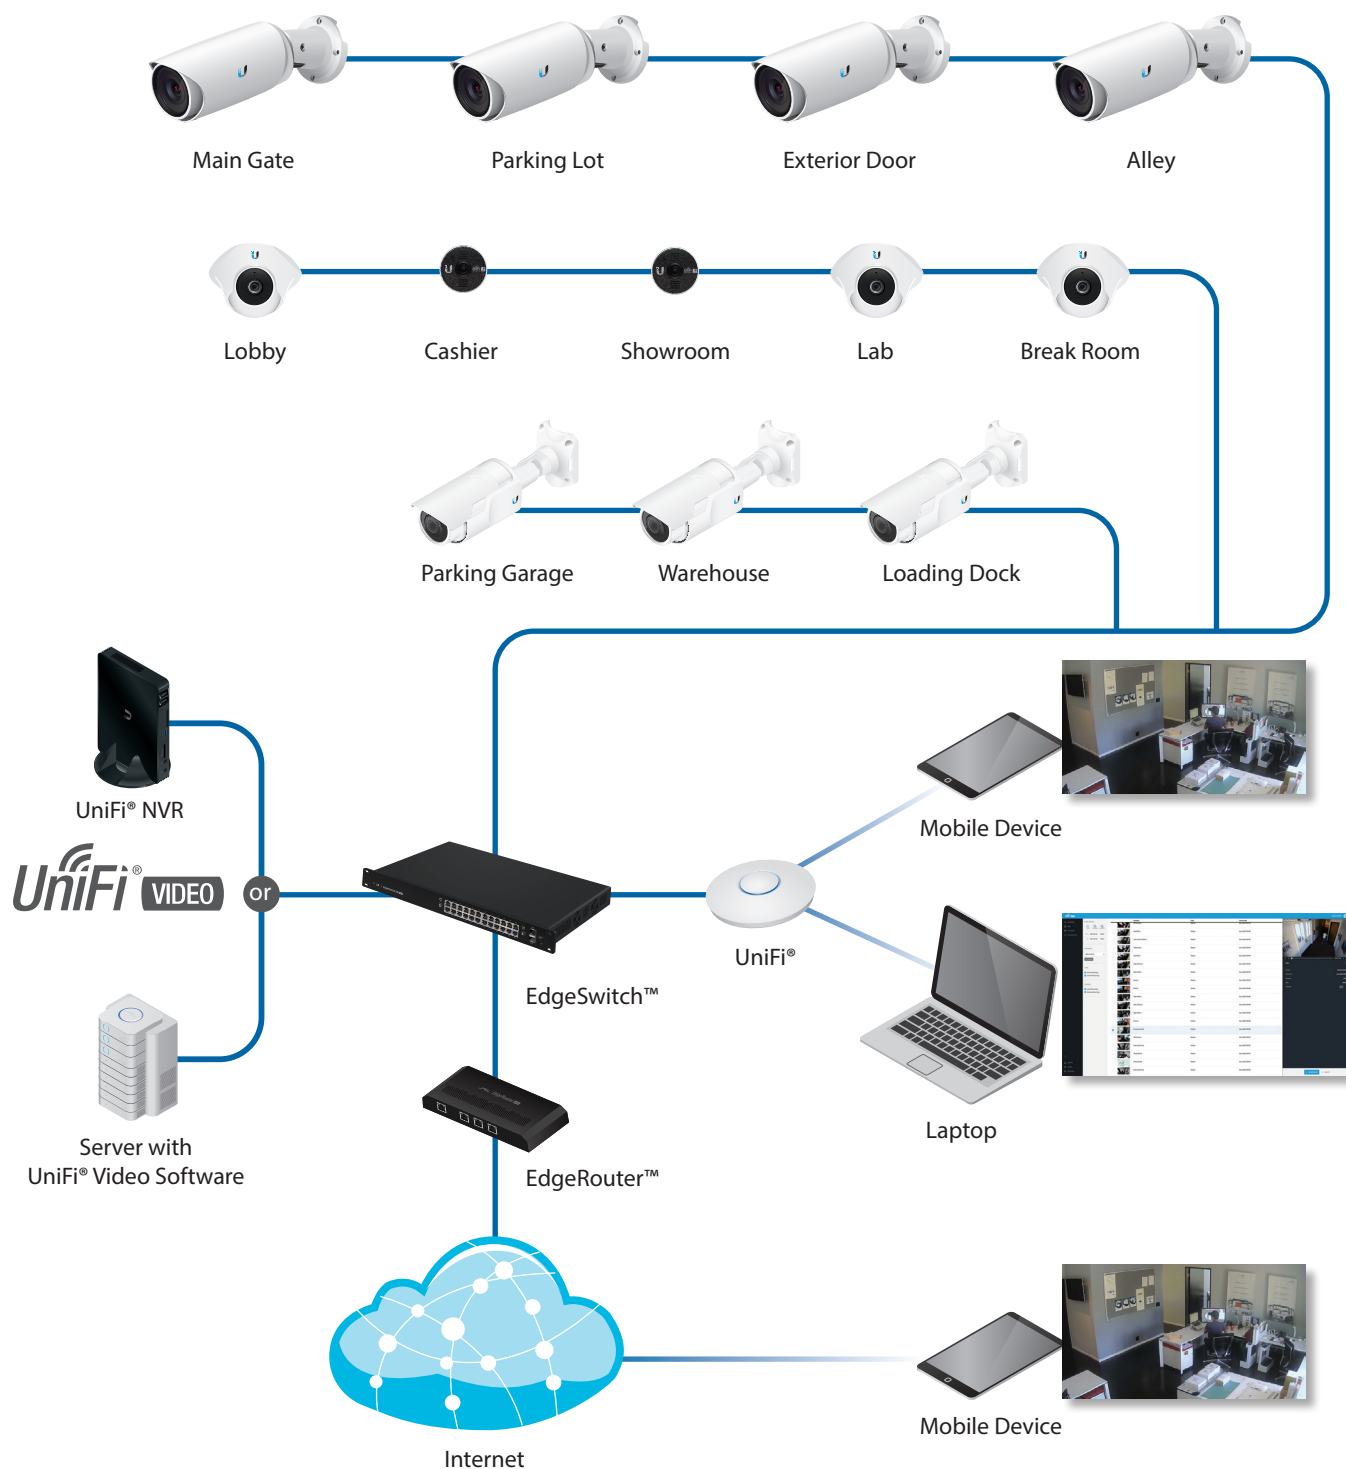

UniFi Video Camera  
Indoor/Outdoor  
720p HD Video



UniFi Video Camera Dome  
Indoor  
720p HD Video



UniFi Video Camera Micro  
Indoor  
720p HD Video



UniFi Video Camera PRO  
Indoor/Outdoor  
1080p HD Video



Day or Night