RUTX12

DUAL LTE CAT 6 INDUSTRIAL CELLULAR ROUTER

RUTX12 360° VIEW

This powerful dual LTE Cat 6 router is a great fit for mission-critical applications. Two cellular modems for dual simultaneous connections, seamless mobile service switching and load balancing features make this device irreplaceable in applications where losing connection is not an option.

4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

DUAL SIM

With auto failover, backup WAN and other switching scenarios

WI-FI & BT

Wave-2 802.11ac Dual Band WIFI and Bluetooth LE

GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

RMS | REMOTE MANAGEMENT SYSTEM

COMPATIBLE WITH RUTX12

MANAGEMENT | ALERTS | CONFIGURATION | ACCESS | FOTA

Copyright © 2025, UAB TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.

KEY FEATURES

HARDWARE

Mobile	2 X 4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Storage	256 MB Flash
Memory	256 MB RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 6 x Connection type, 6 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Weight	540 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and Management	WEB UI, CLI, SSH, CALL, SMS, TR-069, SNMP, JSON-RPC, MQTT, MODBUS, RMS
Cloud solutions	RMS, FOTA, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai

FRONT VIEW

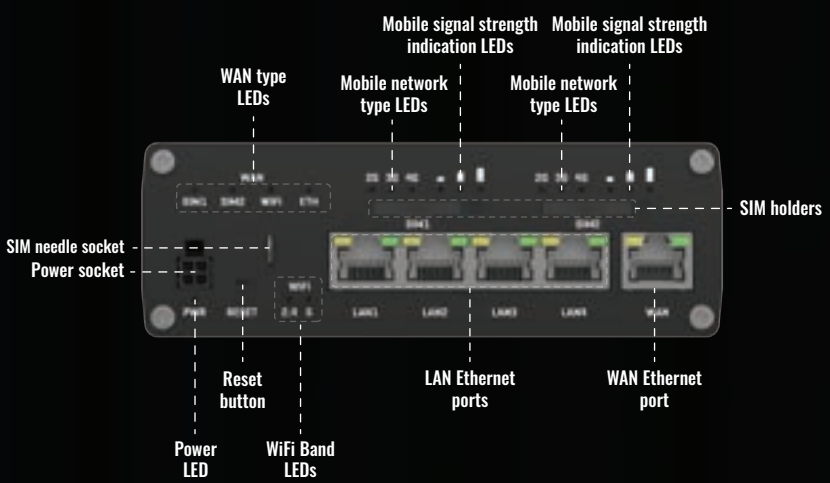

BACK VIEW

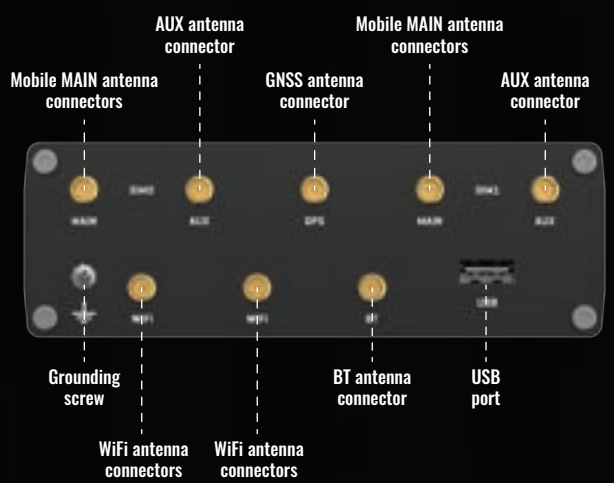

Copyright © 2025, UAB TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.