




TARGA SYSTEM®

Rendiamo più sicure le vostre strade

DataSheet Telecamera Targa System **3** MPX OCR

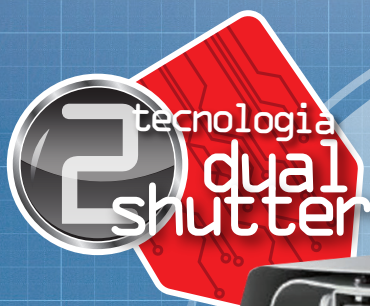

▲ Streaming video e cattura immagine in contemporanea consente video luminosi e lettura della targa

▲ **Ocr intelligente**

Riconoscimento targa

Riconoscimento tipo veicolo

Riconoscimento colore del veicolo

▲ Configurazione avanzata

Esposizione del video e della lettura targhe indipendenti

Osd indipendenti





CAMERA

Sensor	1/1.8" Progressive Scan CCD global shutter
Lens	1/18" F1.4, 11/40 mm varifocal lens
Day & Night	IR cut filter (auto switch & timing & Manual)

COMPRESSION

Video Compression	H.264 / MJPEG
Picture Format	JPEG

IMAGE

Max. Resolution	2048×1536
Frame Rate	2048×1536@60fps
Image Setting	AEC, AGC, saturation, brightness, contrast, sharpness, White balance

NETWORK

Protocols	TCP/IP, HTTP, DHCP, DNS, RTP, RTSP, NTP, FTP
Standard	ONVIF, SDK

INTERFACE

Interface	One 10M/100M/1000M RJ45 Ethernet port; five RS-485 half-duplex interface
On-board storage	One USB interface and one SD card slot with the 128 GB maximize capacity
Trigger Input	Seven external input
Trigger Output	Seven (photoelectric coupling isolation 2500VAC/5V TTL)

FUNCTION

Function	License plate recognition, support vehicle front capture and Speed detection
Terminal Access	Support terminal server access
Light Supplement Control	Support synchronous supplement light , flash lamp or LED strobe-flash
Time synchronized	NTP or GPS
Vehicle Speed Capturing	Support vehicle speed up to 250 km/h
ANPR accuracy	Average ≥97.8% 33 Nations of Europe

GENERAL INFORMATION

Internal configuration	IP67/IK10 Water-proof & dust-proof & network interface lightning protection & anti-surge;
Voltage	100V AC to 240V AC; Frequency: 48Hz to 52Hz / or 12V / DC
Power Consumption	< 30W
Operating Temperature	-40 °C to +60 °C (-4 °F to 140 °F) with heating module
Operating Humidity	5% to 95% @ 40 °C (104 °F), non-condensing
Dimensions (W×H×D)	180×152.7×636 mm (7.09×6.01×25.04 inch)
Weight	6.5±0.5 kg (14.3±1.1 lb)
Local SD/SDHC	Storage or external USB storage/2-ch mini USB storage to realize the pictures storage, overwrite and auto upload

OCR ONBOARD

License plate recognition	Support Countries and regions: 33 Nations of Europe LPR Support Countries and regions England, Ireland, Netherlands, Italy, Croatia, Slovakia, Israel, Germany, France, Greece, Hungary, Czech, Spain, Switzerland, Bulgaria, Poland, Macedonia, Albania, Belgium, Bosnia and Herzegovina, Denmark, Finland, Luxembourg, Malta, Norway, Portugal, Romania, Slovenia, Serbia, Sweden, Vatican, Ukraine, Russia
---------------------------	--



www.targasystem.it

Game Club s.r.l.

Via Negrelli, 42 36040 Brendola (VI)
Tel. +39 0444 1834094 | info@gameclub.it

SOFTWARE SVILUPPATO IN ITALIA DA GAME CLUB S.R.L