TP-LINK®

300Mbps AV500 WiFi Powerline Extender Starter Kit

TL-WPA4220KIT

Features:

- Wi-Fi Clone Button simplifies your Wi-Fi configuration and helps build a seamless unified home network
- HomePlug AV standard providing up to 500Mbps high speed data transmission over a home's existing electrical wiring, ideal for lag-free HD or 3D video streaming and online gaming
- Extend 300Mbps Wireless connections to previously hard-to-reach areas of your home and office
- Two Ethernet ports allow your TVs, game consoles, or PCs connect to the Internet
- Up to 300-meter range over the household power circuit
- Easy-to-install, just plug in, pair and play
- 128-bit AES encryption easily at a push of "Pair" Button
- Supports IGMP managed multicast IP transmission, optimizing IPTV streaming

Description:

TP-LINK 300Mbps AV500 WiFi Powerline Extender Starter Kit TL-WPA4220KIT extends your Internet connection to every room of the house through your home's existing electrical circuitry. The TL-WPA4220 features a Wi-Fi Clone Button enabling Super Range Extension, which means it can automatically copy the SSID and Password of your router. In this way, TL-WPA4220 simplifies your Wi-Fi configuration and allows for seamless roaming within your home network.

SICE DISTRIBUTORE UFFICIALE: www.sicetelecom.it

Specifications:

Hardware Features	
Standards and Protocols	HomePlug AV, IEEE802.3, IEEE802.3u, IEEE802.11b/g/n
Interface	10/100Mbps Ethernet Ports
Plug Type	EU, UK, US, AR
Button	Pair, Reset, Wi-Fi/Wi-Fi Clone
LED Indicator	PWR, PLC, ETH, Wi-Fi/Wi-Fi Clone
Dimensions (W x D x H)	3.7 x 2.1 x 1.6 in. (94 x 54 x 40mm)
Power Consumption	<6W
Range	300 Meters over electrical circuit
Software Features	
Modulation Technology	OFDM (PLC)
Encryption	Powerline Security: 128-bit AES Wireless Security: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK Encryption
Others	
Certifications	CE, FCC, RoHS
System Requirements	Windows 8/7/Vista/XP/2000, Mac OS, Linux*
Environment	Operating Temperature: 0℃~40℃ (32℉~104℉) Storage Temperature: -40℃~70℃ (-40℉~158℉) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

* Utility supports Windows 8/7/Vista/XP/2000 operating system for the present.

Diagram:

PLUG & PLAY WITH TP-LINK WI-FI CLONE!

> Plug in TL-WPA4220 near your router.
> Press the Wi-Fi Clone button on TL-WPA4220.
> Press the WPS button on the router.
That's it! Now TL-WPA4220 has copied your router's SSID and Password and you can enjoy a unified home network!

UNIFIED HOME NETWORK

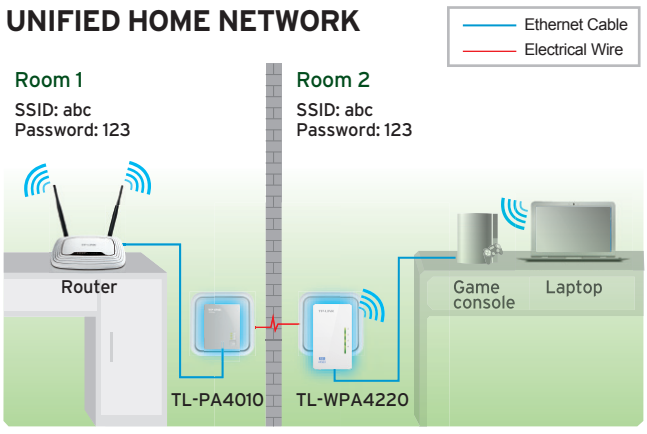

*The Powerline Adapters need to be connected in the same electrical circuit.

Package:

- 300Mbps AV500 WiFi Powerline Extender Starter Kit TL-WPA4220 & TL-PA4010
- 2-meter RJ-45 Ethernet Cable * 2
- Quick Installation Guide
- Resource CD

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any

SICE DISTRIBUTORE UFFICIALE: www.sicetelecom.it